

REMOVABLE CEILING DISC FOR ACCESS TO PLUMBING

HAND SHOWER

REFER TO SCHEMATIC DRAWING FOR VALVE AND PLUMBING LAY OUT

CEILING MOUNTED 20NB(3/4") COLD WATER SUPPLY LINE, BY CLIENT

CEILING MOUNTED 20NB(3/4") HOT WATER SUPPLY LINE, BY CLIENT

DRENCH SHOWER HEAD

OVER HEAD SPRAY RING

HYDROCOLOR LIGHTING

3 - BODY SHOWER HEADS WALL MOUNTED TYP. 3 PLACES

127 (5")

700 (27.56")

1654 (66.12")

700 (27.56")

127 (5")

CEILING MOUNTED ELECTRICAL CONNECTION

100

600

400

GLASS DOOR BY CLIENT (SEE BELOW)

127 (5")

950 (37.4")

1200 (47.25")

127 (5")

NOMINAL WALL THICKNESS TO LOCAL CODES

2404 (94.65") PLAN VIEW



GRATE FLOOR DRAIN BY CLIENT

CEILING MOUNTED 20NB(3/4") COLD WATER SUPPLY LINE

CEILING MOUNTED 20NB(3/4") HOT WATER SUPPLY LINE

SEAL BETWEEN TOP OF WALL, AND CEILING WITH WATER PROOF SEALANT

20(3/4") TO CLEAR CEILING FIXING SCREWS AT ASSEMBLY

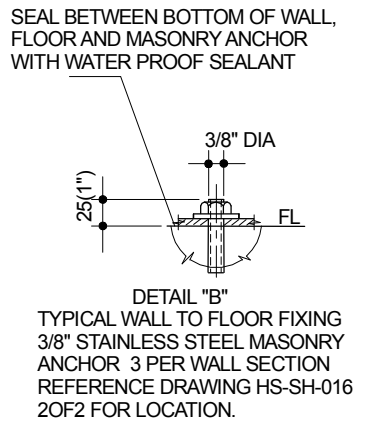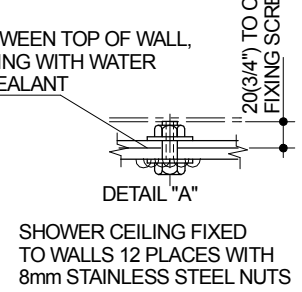

- SPECIFICATION:**
- PLUMBING:**
- 20mm(3/4")NB PIPE HOT WATER SUPPLY AT 4 - 5.5 BAR (60-80PSI)
 - 20mm(3/4")NB PIPE COLD WATER SUPPLY AT 4 - 5.5 BAR (60-80PSI)
 - INLINE STRAINERS AND ISOLATING VALVES MUST BE FITTED TO HOT & COLD WATER SUPPLY
 - 100mm(4") DRAIN CONNECTION MIN.
- ELECTRICAL SUPPLY:**
- 230 VOLT Ac 50Hz 10AMP SINGLE PHASE DEDICATED SUPPLY VIA A "ELCB" NORTH AMERICA
 - 115VOLT Ac 60Hz 5 Amp USA VIA A CLASS "A" GFCI

- LEGEND:**
- 20NB(3/4") HOT WATER SUPPLY LINE
 - 20NB(3/4") COLD WATER SUPPLY LINE
 - ⊞ ELECTRICAL SUPPLY

TOUGHENED GLASS DOOR TO BE SUPPLIED BY CLIENT TO LOCAL CODES MAX AIR GAP AROUND DOOR 6mm(1/4")

NOTE: FLOOR SLOPE AND DRAIN TO BE PREPARED BY CLIENT

<p>KOSLEX PTY LTD NOBLE PARK VICTORIA AUSTRALIA ph.+61 3 9999 7978 www.koslex.com fax.+61 3 9701 5282</p>		<p>TITLE: THE HYDROHELL SHOWER LEFT HAND ENTRY.</p>		<p>HYDROHELL SHOWER IN WALL CONFIGURATION</p>	
		<p>DRN: Michael</p>	<p>DATE: 05.12.12</p>		<p>SCALE: NTS</p>
<p>TOLERANCES UNLESS SPECIFIED</p>	<p>DIM: +0.2</p>	<p>ANGLES: +0.5°</p>	<p>THIRD ANGLE</p>	<p>CHKD: APPD: REV:</p>	<p>DRG No. HS-SH-025</p>

NOTE: THIS DRAWING IS TO BE USED AS A GUIDE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE