

NOTE: INSTALL IN ACCORDANCE WITH LOCAL AND NATIONAL CODE REQUIREMENTS.


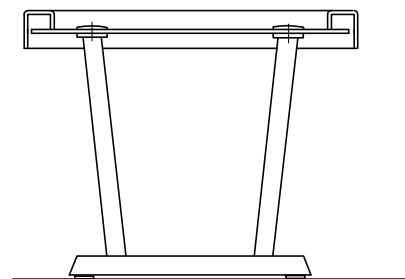


TABLE SECTION - END VIEW
VICHY SHOWER NOT SHOWN

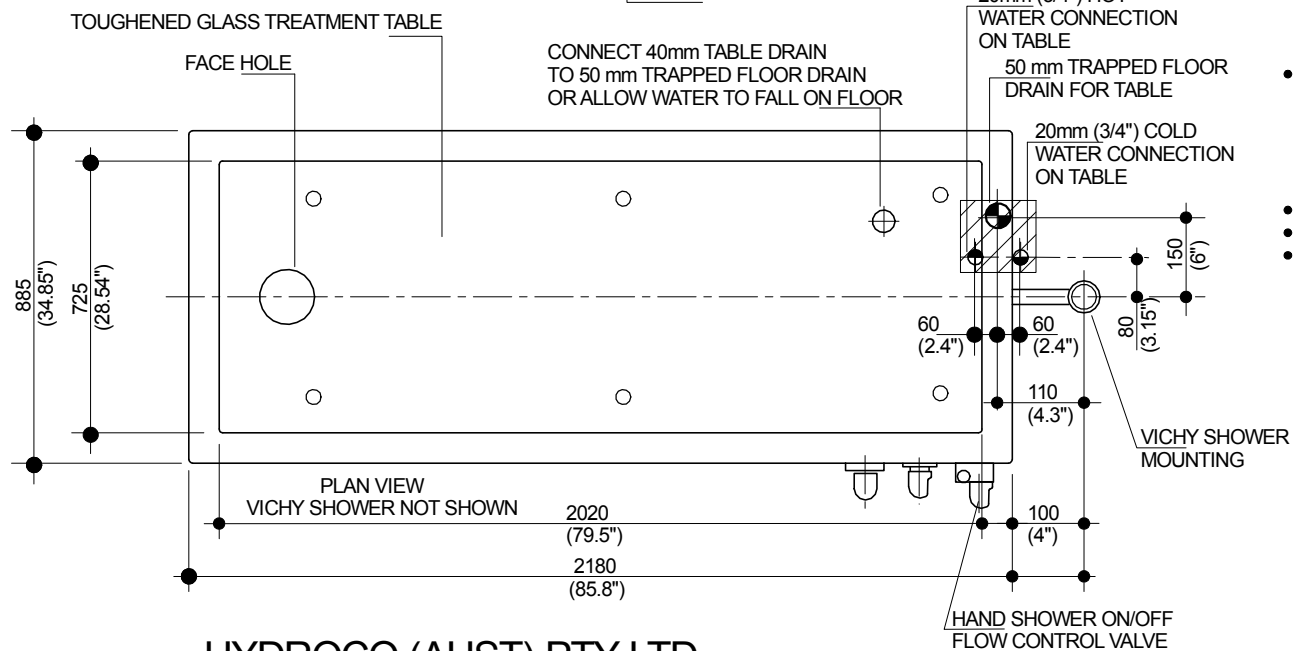

PLUMBING:

- 20mm NB(3/4") HOT & COLD WATER SUPPLY LINES MAX PRESSURE 7 BAR (100 PSI) 4 BAR (60 PSI) TO 5 BAR (70 PSI) RECOMMENDED. FIT SHUT OFF VALVES IN WATER SUPPLY LINES. (SERVICEABLE STRAINERS SUPPLIED)
- 50mm (2") FLOOR DRAIN FOR ROOM.(NOT SHOWN)
- 50mm (2") TRAPPED DRAIN FOR TABLE DRAIN CONNECTION.
- APPROXIMATELY 400 LITRES (100 GALLONS) USED FOR A (20) TWENTY MINUTE TREATMENT.BASED UPON HYDROCO TREATMENT ASSUME 200 LITRES (50 GALLONS) OF THIS BEING HOT WATER BASED ON THE EXPECTED NUMBER OF TREATMENTS DAILY AN APPROPRIATE HOT WATER SUPPLY NEEDS TO BE INSTALLED.

LEGEND:

- 50mm (2") FLOOR DRAIN - FOR TABLE DRAIN CONNECTION
- 50mm (2") FLOOR DRAIN - FOR ROOM DRAIN (NOT SHOWN)
- HW ● 20mm (3/4") HOT WATER CONNECTION
- CW ● 20mm (3/4") COLD WATER CONNECTION
- ⊕ 40mm (1 1/2") TABLE DRAIN (IN TABLE)
- ▨ SERVICES AREA - FLOOR LOCATION

HYDROCO (AUST) PTY LTD
SEAFORD VICTORIA AUSTRALIA

ph.+61 3 8770 4000 www.hydroco.com fax.+61 3 9773 6122

HYDROGLASS 7 - LAYOUT SPECIFICATION

DRG No.HG-7-INST-001

NOTE! THIS DRAWING IS TO BE USED AS A GUIDE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE

12 JUNE 2008