


NOTE: - THIS IS TO BE USED AS A GUIDE ONLY, THE MANUFACTURER RESERVES THE RIGHT TO AMEND SPECIFICATIONS WITHOUT PRIOR NOTICE

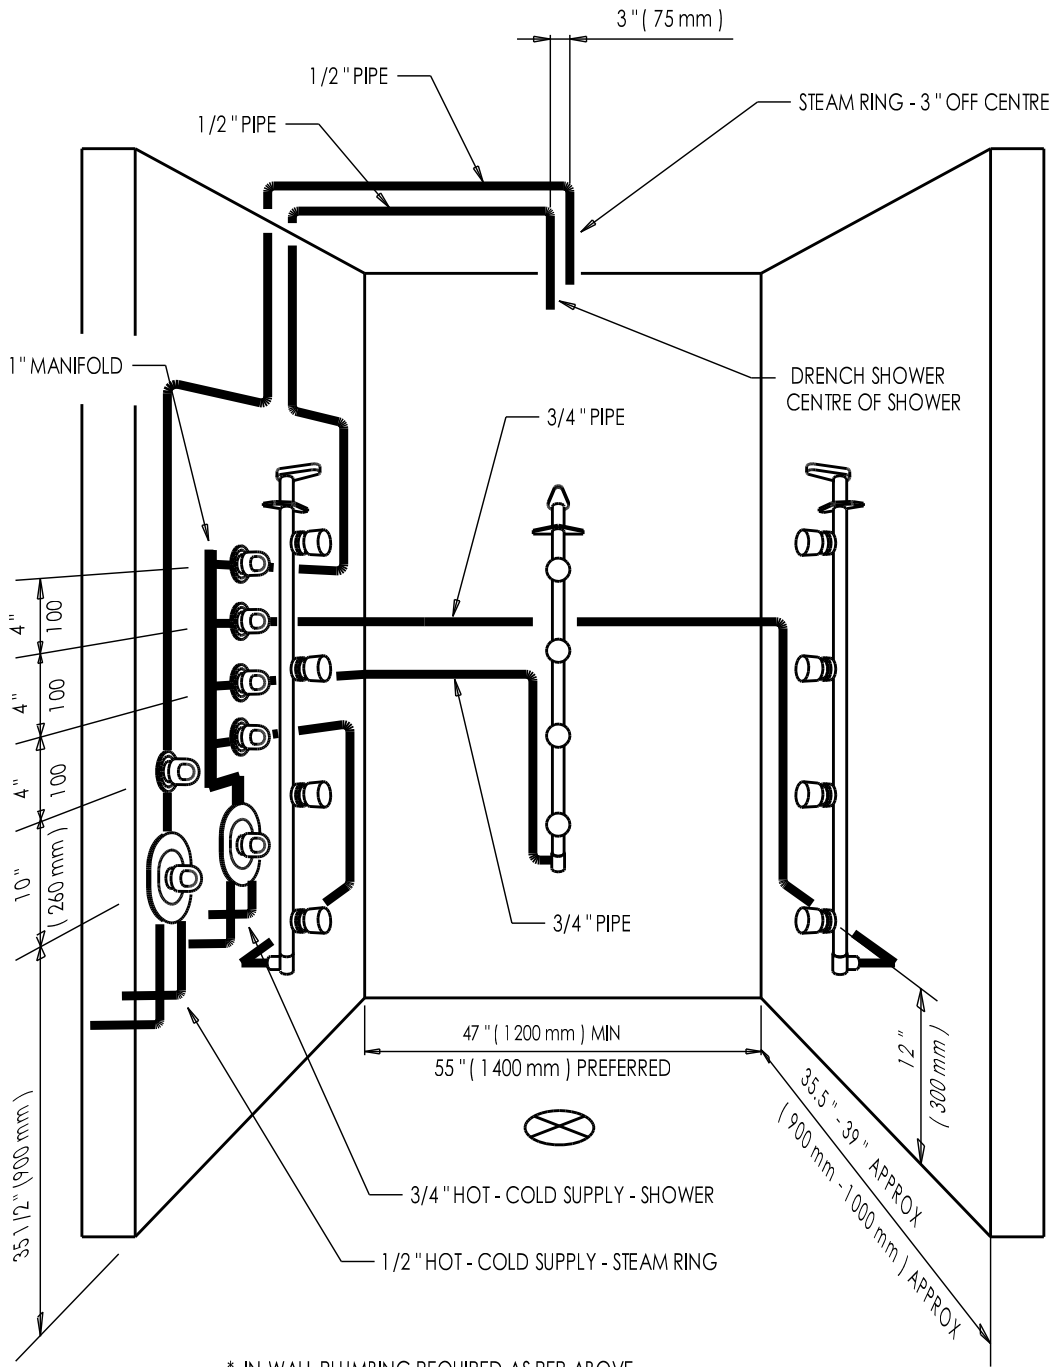

\* IN-WALL PLUMBING REQUIRED AS PER ABOVE .

\* 1/2" BRASS ALL THREAD TO PROTRUDE THROUGH ROOF APPROX 2" ( 50 mm ) IN LENGTH - DRENCH SHOWER

\* 1/2" BRASS ALL THREAD TO PROTRUDE THROUGH ROOF APPROX 1" ( 25 mm ) IN LENGTH - STEAM RING

\* SUPPLY WATER PIPES - 1" ( 3/4" MINIMUM )

\* WATER PRESSURE REQUIRED - 50 PSI + ( 3.4 Bar + ) OPTIMUM 70 PSI ( 4.8 Bar )

SHEET 1 OF 2



www.hydroco.com

# HYDROSWISS Spray Bar Configuration with Steam Ring

HydroCo ( Australia ) Pty. Ltd. HydroCo ( USA )

+61 3 8770 4000 - PHONE

+61 3 9773 6122 - FAX

31 0.381.0071 - PHONE

31 0.381.0072 - FAX